



Fabrication of completely free-standing pyrolytic carbon string resonators

Nguyen, Quang Long; Larsen, Peter Emil; Boisen, Anja; Keller, Stephan Sylvest

Publication date:
2017

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Nguyen, Q. L., Larsen, P. E., Boisen, A., & Keller, S. S. (2017). *Fabrication of completely free-standing pyrolytic carbon string resonators*. Abstract from 43rd International conference on Micro and Nano Engineering, Braga, Portugal.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Fabrication of completely free-standing pyrolytic carbon string resonators

Long Nguyen Quang ^a, Peter Emil Larsen ^a, Anja Boisen ^a, Stephan Sylvest Keller ^a

^a The Danish National Research Foundation and Villum Foundation's Center for Intelligent Drug Delivery and Sensing Using Microcontainers and Nanomechanics (IDUN), Department of Micro- and Nanotechnology, Technical University of Denmark, Kgs. Lyngby, Denmark

e-mail: longq@nanotech.dtu.dk

Keywords: pyrolytic carbon, MEMS resonator, mass sensor

Here, we present a novel method for fabrication of carbon string resonators obtained by pyrolysis of suspended SU-8 micro strings in inert atmosphere at high temperature. The fabricated strings were characterized by optical readout to get the resonance frequencies and quality factors. We analyzed the resonance behavior of the optimized string resonators and performed a first proof-of-concept of mass sensing using polystyrene micro particles.

In the past few decades, Micro Electro-Mechanical Systems (MEMS) sensors have become increasingly attractive for a wide range of applications such as pressure sensors, accelerometers and gyroscopes due to the high sensitivity, small size and low costs. Among all those sensors, MEMS resonators with high sensitivity and short response time show promising applications. For MEMS resonators such as cantilevers (single-clamped beams), strings (double-clamped bridges) and membranes, the working principle is based on the frequency shift due to external stimuli such as changes in mass [1] or temperature [2]. Recently, carbon MEMS (C-MEMS) was introduced as a method to fabricate microstructures in pyrolytic carbon. The main advantage of the pyrolytic carbon as a resonator material is that its properties can be tailored due to the possibility to modify the pyrolysis parameters [3]. Additionally, pyrolytic carbon is electrically conductive which potentially can be used for actuation or readout. In our previous work [4], pyrolytic carbon string resonators were fabricated. However, the gap between the strings and the underlying substrate was very small and the proximity of the substrate made it impossible to deposit and analyse samples such as micro particles. For this purpose, new pyrolytic carbon string resonators fully separated from the substrate and placed over a through-wafer hole are needed.

In this work, the new fabrication process for fully free-standing pyrolytic carbon string resonators is presented (Figure 1). The fabrication process starts with n-type double side polished Si wafer. Then, 200nm of low-stress SiN was grown on both sides. Next, the opening window is patterned from the backside followed by dry etching step. The strings were patterned on the front side by photolithography with SU-8 photoresist. The SiN layer underneath of SU-8 then is etched from the backside. Finally, the SU-8 strings were converted into pyrolytic carbon strings by pyrolysis process at 700°C. A 300x30µm fully free-standing pyrolytic carbon string resonator is shown in Figure 2. After fabrication, the fully free-standing pyrolytic carbon string resonators were characterized with a Laser Doppler Vibrometer system. Figure 3 shows the resonance frequencies and quality factors of the string resonators with three different lengths.

Micro particles based on polystyrene which have 10µm in size were dispersed in liquid. The deposition on fully free-standing pyrolytic carbon string resonators is done by nebulizing the solution using jet nebulizer. After drying, the string resonators were characterized again to track the frequency shift. Figure 4 shows the resonance frequency of the 300x30µm free-standing pyrolytic carbon string resonator after sampling. The results show that the resonance frequency decreased compared to the original frequency due to the particles adhering to the string.

In conclusion, we fabricated the fully free-standing pyrolytic carbon string resonators suitable for sampling. The results indicate that the fully free-standing pyrolytic carbon string resonators can work as mass sensor.

- [1] A. Boisen, S. Dohn, S. S. Keller, S. Schmid and M. Tenje, Rep. Prog. Phys., Vol. 74, 2011.
- [2] Larsen, T, Schmid, S, Gronberg, L, Niskanen, AO, Hassel, J, Dohn, S & Boisen, A, Applied Physics Letters, vol 98, no. 12, 2011.
- [3] J. A. Lee, S. W. Lee, K.-C. Lee, S. I. Park, S. S. Lee, J. Micromech. Microeng. Vol. 18, pp. 035012, 2008.
- [4] Kurek, Maksymilian; Larsen, Frederik K.; Larsen, Peter Emil; Schmid, Silvan; Boisen, Anja; Keller, Stephan Sylvest. Sensors, Vol. 16, No. 7, p. 1097, 2016.




Figure 1. Fabrication process of free-standing pyrolytic carbon string resonators.




Figure 2. SEM image of free-standing pyrolytic carbon string resonator.

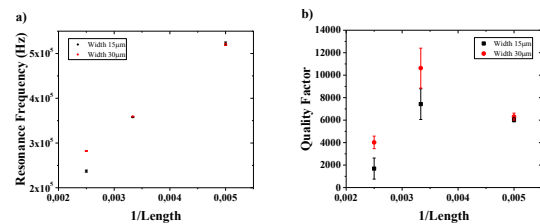


Figure 3. Resonance frequencies (a) and quality factor (b) of free-standing pyrolytic carbon string resonators.

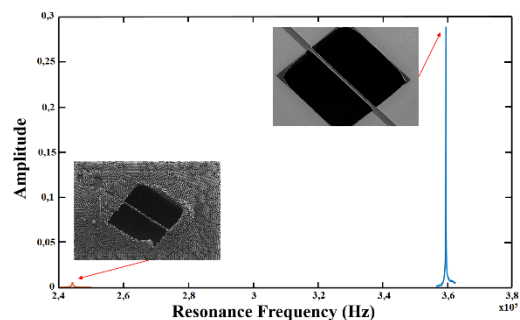


Figure 4. Frequency shift of free-standing pyrolytic carbon string resonator.